



Optically High Clarity Polyester Film

(Both side untreated film)

SUPET S-103

Product Description

S-103 grade is a Bi axially Oriented High Clarity Polyester film with both side no surface treatment. This film is characterized by high transparency.

Product features


- ❖ High surface gloss
- ❖ Excellent clarity and transparency
- ❖ Excellent thermal, dimensional & mechanical properties
- ❖ Excellent processability

Product Applications

- ❖ Suitable for holographic, metallization, lamination
- ❖ Labels, Photosensitive coatings

Food Contact

This film complies with US FDA , EC directive & REACH regulation for food packaging.

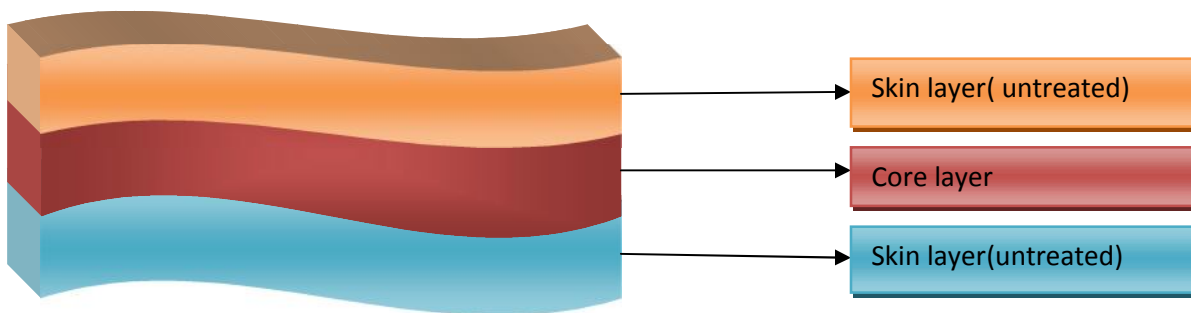

Head Office : 6/121 A-1, Paiki, Plot no.8, First floor,Vairagini wadi,Delhi gate Surat-395003,Gujarat , INDIA
TEL. NO: +91-261- 2441122 / 6797979, FAX NO: +91-261-2442952 , **web: www.sumilon.com**

WORKS: 43/P NH-8A, Village Varsana, Talq. Anjar, Gandhidham-370201, Gujarat (India). Phone No.: +91-2836-324900





Optically High Clarity Polyester Film

(Both side untreated film)

SUPET S-103

Technical Specification

Properties	Unit	Test Method	Typical Values								
General Properties											
Thickness	Micron	SPTM	10	11	12	15	19	23	36	50	
Yield	m ² /kg	SPTM	71	65	59	48	38	31	20	14	
Mechanical Properties											
Tensile Strength (Min)	MD	Kg/cm ²	ASTM D 882	2100	2100	2100	2100	2100	2100	1900	1900
	TD			2000	2000	2000	2000	2000	2000	1900	1900
Elongation at Break (Min)	MD	%	ASTM D 882	90	90	90	90	90	110	110	110
	TD			90	90	90	90	90	100	100	100
Surface Properties											
Coefficient of Friction (Max)	St.	-	ASTM D 1894	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50
	Dy.			0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45
Wetting Tension on untreated side		Dynes/cm	ASTM D 2578	42	42	42	42	42	42	42	42
Optical Properties											
Haze (Max)		%	ASTM D 1003	1.2	1.5	1.5	1.5	1.5	1.5	1.8	1.8
Transmittance (Min)		%	ASTM D 1003	90	90	90	90	90	90	90	90
Thermal Properties											
Heat Shrinkage @150°C/30minute (Max)	MD	%	ASTM D 1204	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
	TD			0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4
Barrier Properties											
WVTR(38°C & 90%RH)		gm/m ² /day	ASTM F 1249	<45	<45	<40	<35	<30	<25	<22	<18
OTR (23°C & 0 %RH)		cc/m ² /day	ASTM D3985	<135	<135	<135	<120	<100	<75	<55	<45

MD : Machine direction TD : Transverse direction SPTM : Sumilon Polyester Test Method

Storage & Handling

Rolls are covered by stretch wrap and which may have the chances to attract the dust particles. Use SUPET film on FIFO system and advised to rotate the film stock. The storage hall should be away from flame/ heated substances. Also rolls kept away from the bad weather conditions. The recommended temperature range is 24°C to 35°C with relative humidity of 55-60%. It is recommended that the film should not get exposed to direct Sunlight and water /moisture.

Disposal

Disposal of S-103 does not present special disposal problems. Where waste occurs in a clean, uncontaminated form, it can be recycled. In most circumstances, once S-103 has been laminated, coated, printed or metallized, incineration with Energy Recovery is the most environmentally efficient recovery route. It can also be burned in an incinerator with normal refuse. The disposal method should comply with appropriate local and country.

Disclaimer

The values given in this technical datasheet are typical performance data and are believed to be accurate. These are given in good faith but it is for the customer to satisfy of the suitability for its own particular purpose. Sumilon Polyester Limited suggests the customer to confirm these values and product compatibility prior to their use and the company offers neither guarantee nor accepts any responsibility for the fitness of the product for any particular use.

TDS issued on 15/08/2019. All previous version of this grade are invalid.

Head Office : 6/121 A-1, Paiki, Plot no.8, First floor, Vairagini wadi, Delhi gate Surat-395003, Gujarat, INDIA
TEL. NO: +91-261-2441122 / 6797979, FAX NO: +91-261-2442952, web: www.sumilon.com

WORKS: 43/P NH-8A, Village Varsana, Talq. Anjar, Gandhidham-370201, Gujarat (India). Phone No.: +91-2836-324900

