



Yarn Grade Polyester Film

(One side corona treated & other side untreated film)

SUPET S-152

Product Description

S-152 grade is Bi axially Oriented Transparent Yarn Grade Polyester film with one side corona treated & other side no surface treatment. This film exhibit excellent tensile strength and shrinkage for yarn grade application.

Product features


- ❖ Excellent mechanical properties
- ❖ Excellent dimensional stability at elevated temperature
- ❖ High clarity and transparency
- ❖ Ensure excellent process ability

Product Applications

- ❖ Plain and metallic yarn application

Food Contact

This film complies with US FDA , EC directive & REACH regulation for food packaging.

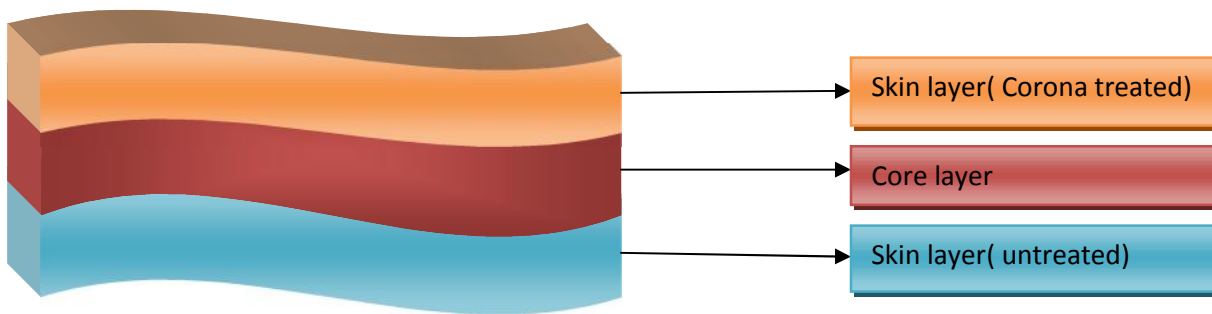



Yarn Grade Polyester Film

(One side corona treated & other side untreated film)

SUPET S-152

Technical Specification

Properties	Unit	Test Method	Typical Values							
General Properties										
Thickness	Micron	SPTM	8	10	11	12	15	19	23	
Yield	m ² /kg	SPTM	89	71	65	59	48	38	31	
Mechanical Properties										
Tensile Strength (Min)	MD	Kg/cm ²	ASTM D 882	2200	2200	2200	2200	2200	2200	2200
	TD			2000	2000	2000	2000	2000	2000	2000
Elongation at Break (Min)	MD	%	ASTM D 882	90	90	90	90	90	90	100
	TD			90	90	90	90	90	90	90
Surface Properties										
Coefficient of Friction (Max)	St.	-	ASTM D 1894	0.50	0.50	0.50	0.50	0.50	0.50	0.50
	Dy.			0.45	0.45	0.45	0.45	0.45	0.45	0.45
Wetting Tension on treated side	Dynes/cm	ASTM D 2578	52+	52+	52+	52+	52+	52+	52+	
Optical Properties										
Haze (Max)	%	ASTM D 1003	3.0	3.0	3.0	3.5	3.5	3.5	4.0	
Transmittance (Min)	%	ASTM D 1003	88	88	88	88	88	88	88	
Thermal Properties										
Heat Shrinkage @190°C/20minute (Max)	MD	%	ASTM D 1204	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	TD			0.0	0.0	0.0	0.0	0.0	0.0	0.0
Barrier Properties										
WVTR(38°C& 90%RH)	gm/m ² /day	ASTM F 1249	<65	<45	<45	<40	<35	<30	<25	
OTR (23°C & 0 %RH)	cc/m ² /day	ASTM D3985	<145	<135	<135	<135	<120	<95	<75	

MD : Machine direction TD : Transverse direction SPTM : Sumilon Polyester Test Method

Storage & Handling

Rolls are covered by stretch wrap and which may have the chances to attract the dust particles. Use SUPET film on FIFO system and advised to rotate the film stock. The storage hall should be away from flame/ heated substances. Also rolls kept away from the bad weather conditions. The recommended temperature range is 24°C to 35°C with relative humidity of 55-60%. It is recommended that the film should not get exposed to direct Sunlight and water /moisture.

Disposal

Disposal of S-152 does not present special disposal problems. Where waste occurs in a clean, uncontaminated form, it can be recycled. In most circumstances, once S-152 has been laminated, coated, printed or metallized, incineration with Energy Recovery is the most environmentally efficient recovery route. It can also be burned in an incinerator with normal refuse. The disposal method should comply with appropriate local and country.

Disclaimer

The values given in this technical datasheet are typical performance data and are believed to be accurate. These are given in good faith but it is for the customer to satisfy of the suitability for its own particular purpose. Sumilon Polyester Limited suggests the customer to confirm these values and product compatibility prior to their use and the company offers neither guarantee nor accepts any responsibility for the fitness of the product for any particular use.

TDS issued on 15/08/2019. All previous version of this grade are invalid.

Head Office : 6/121 A-1, Paiki, Plot no.8, First floor, Vairagini wadi, Delhi gate Surat-395003, Gujarat, INDIA
 TEL. NO: +91-261-2441122 / 6797979, FAX NO: +91-261-2442952, web: www.sumilon.com

WORKS: 43/P NH-8A, Village Varsana, Talq. Anjar, Gandhidham-370201, Gujarat (India). Phone No.: +91-2836-324900

